



TRANSFORMER WIRING DIAGRAM

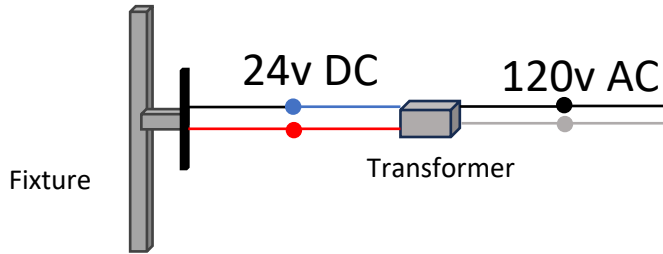

TURN OFF POWER PRIOR TO INSTALLATION!

ASSEMBLY

Attach backplate (face portion) to light bar. Slip backplate over nipple, followed by large washer, star washer, split washer and two nuts. Tighten first nut, then tighten the second nut against the first.



INSTALLATION

1. Insert 24vDC transformer into junction box. (see pic A)
2. Connect 120v AC wires (Black and White) to corresponding wires on transformer (AC IN side of transformer) with provided wire nuts.
3. Attach backplate to junction box. The backplate should be orientated so faceplate mounting screw holes are on sides of backplate. Ensure backplate is level. (see pic B)
4. Make 24v DC connections with driver and fixture; ensure RED connects to RED, BLUE connects to BLACK. (see pic C)
5. Mount fixture to backplate, install set screws on both sides of faceplate.
6. Turn on power and test fixture.

